## JOCHA14B-M5

Rev.A.1.0

## DESCRIPTION:

~ +110



## MAIN FEATURES

## Truth Table

| | |
|---|---|
| | |
| | |

## ABSOLUTE MAXIMUM RATINGS

| Parameter | | Symbol | Value | Unit |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

## Recommended Operating Conditions

| Characteristics | Symbol | Min. | Typ. | Max. | Unit |
|---|---|---|---|---|---|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

| | | | | | |
|---|---|---|---|---|---|
| | | | | | |
| | | | | | |

## ORDERING INFORMATION

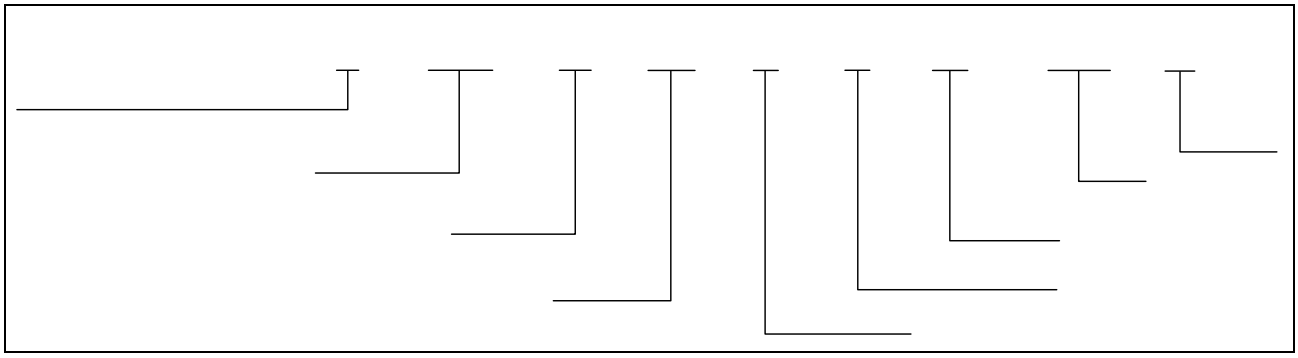

| Packing Quantity | | | |
|---|---|---|---|
| **Option** | **Quantity** | **Quantity – Inner box** | **Quantity –Outer box** |
| SOP5 | 3000 Units/Reel | 2 Reels/Inner box | 5 Inner box/Outer box =30k Units |

## MARKING

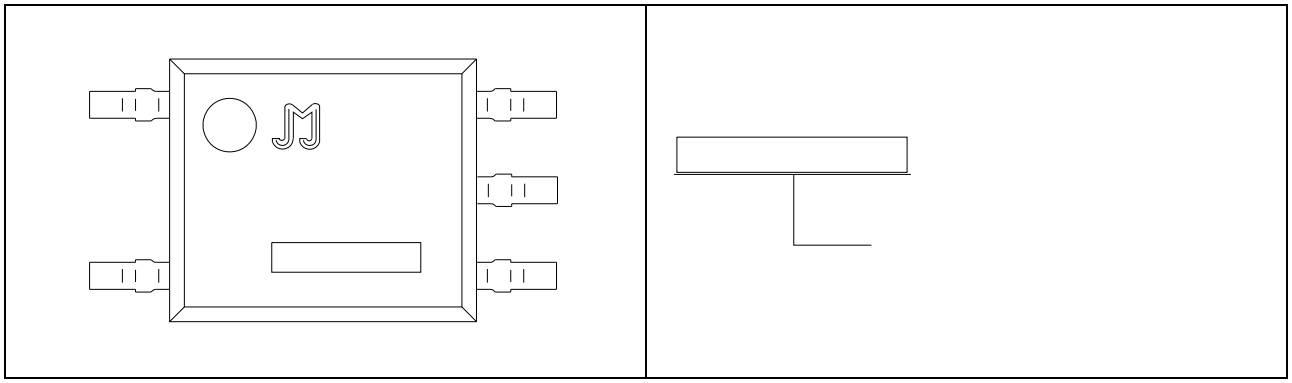

## Characteristics Curves

**FIG.1:**

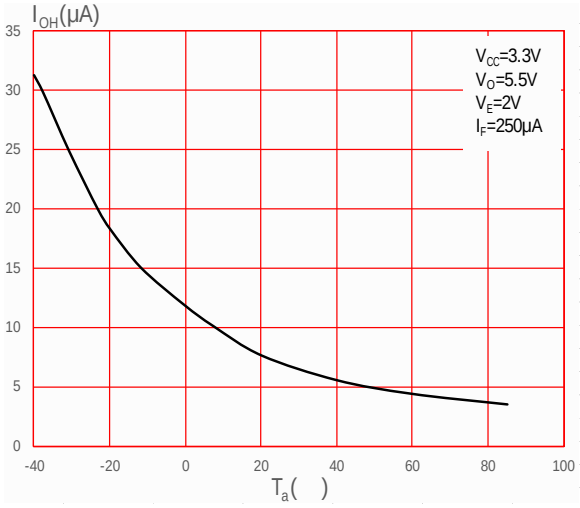


**FIG.2:**

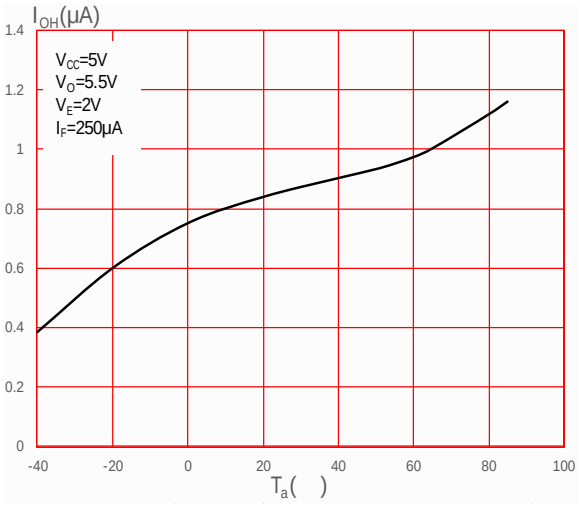


**FIG.3:**

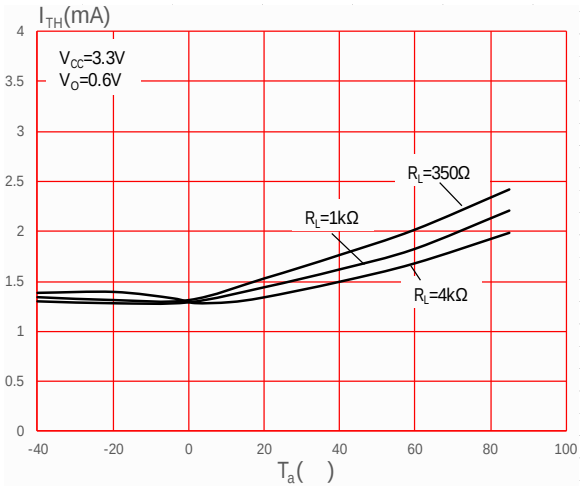


**FIG.4:**

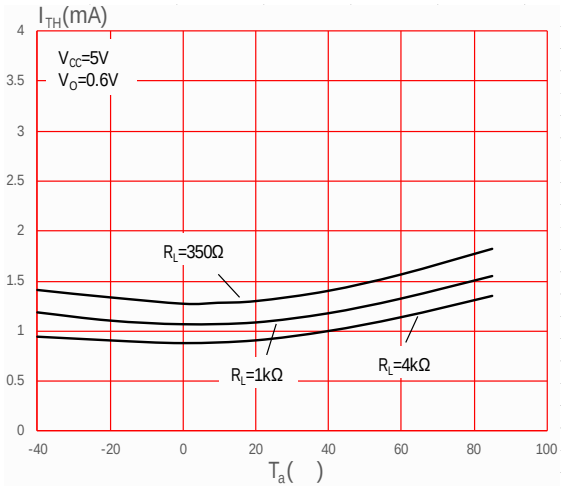


**FIG.5:**

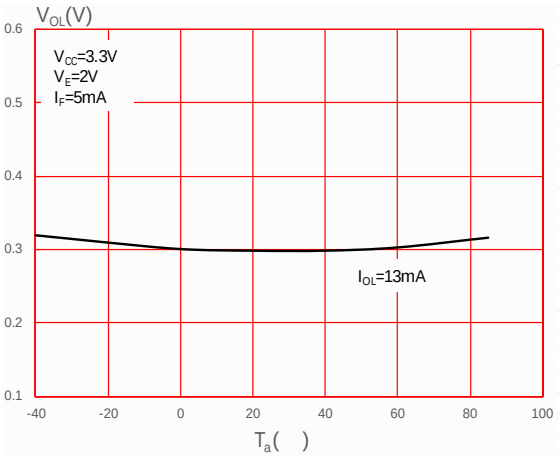


**FIG.6:**

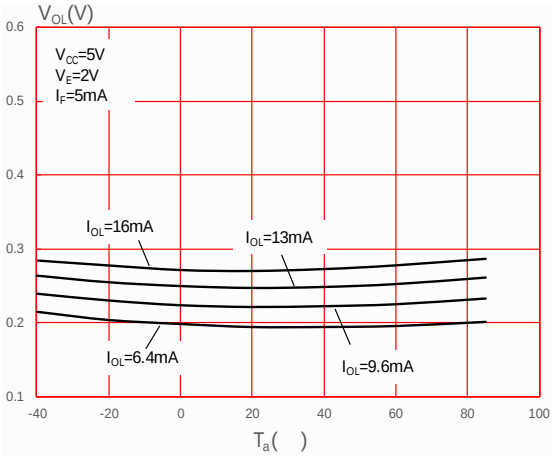

**FIG.7:**

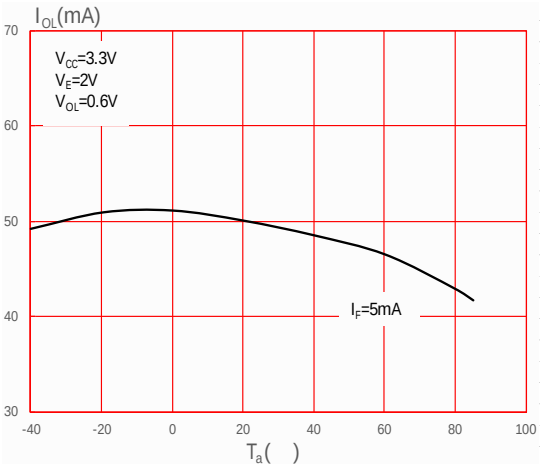


**FIG.8:**

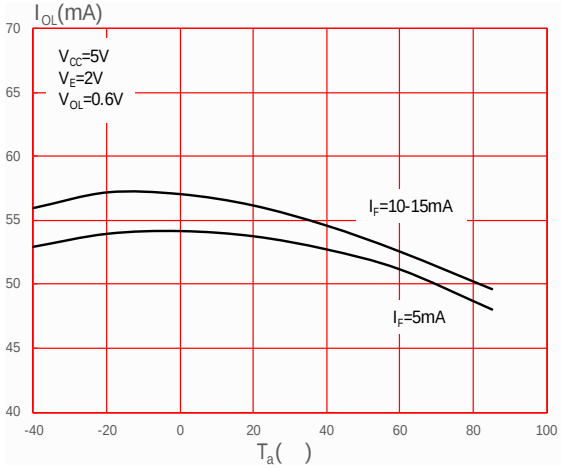


**FIG.9:**

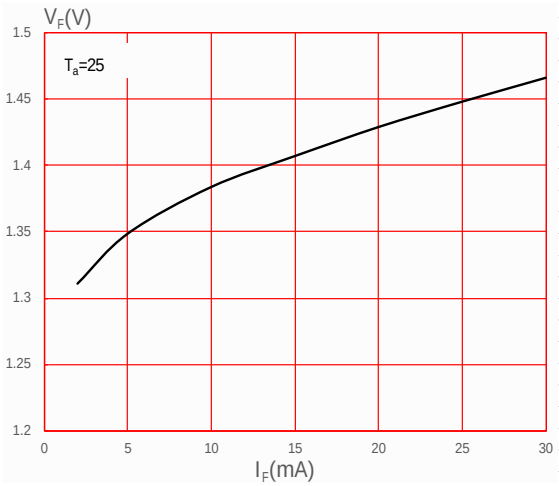


**FIG.10:**

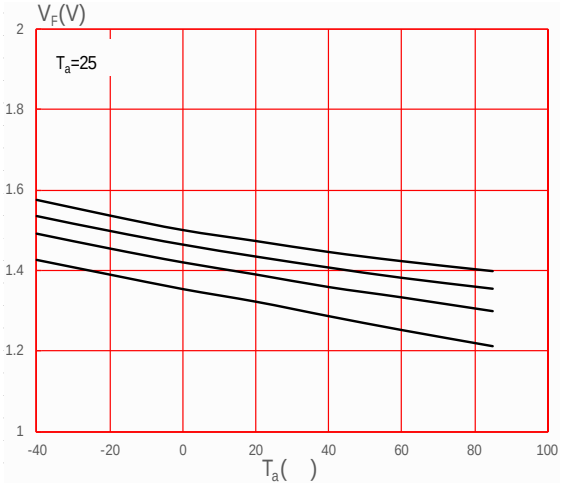

**FIG.13:**

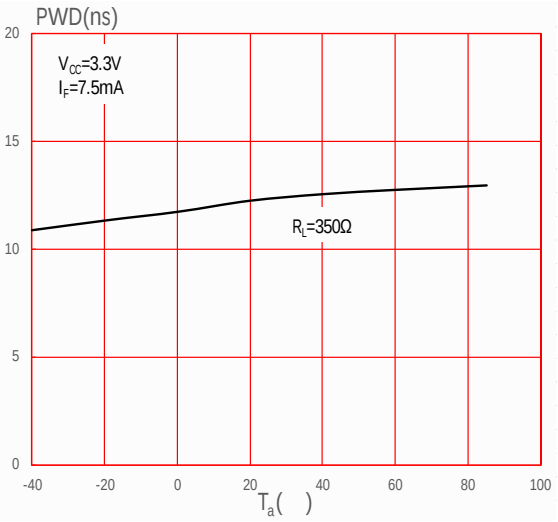


**FIG.14:**

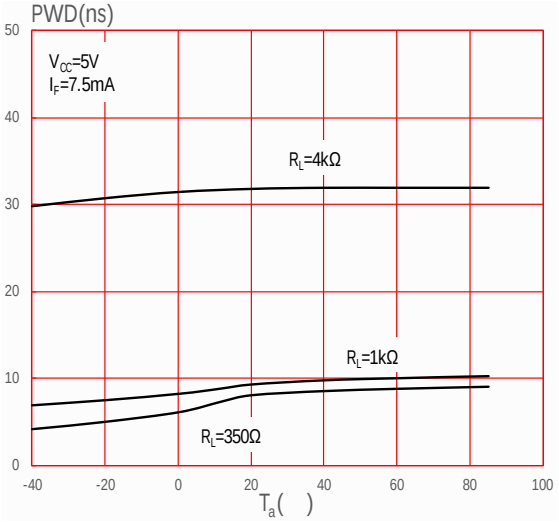


## TEST CIRCUITS

**Fig.15: Test Circuit and Waveform of $t_{PHL}$, $t_{PLH}$**

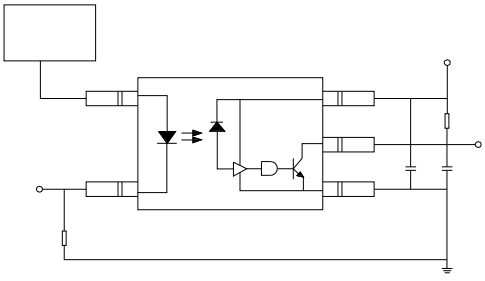

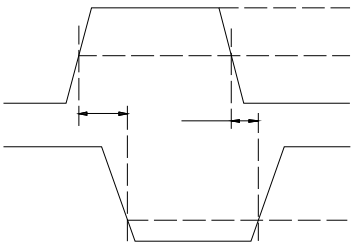

## Package Dimension (Unit: mm)

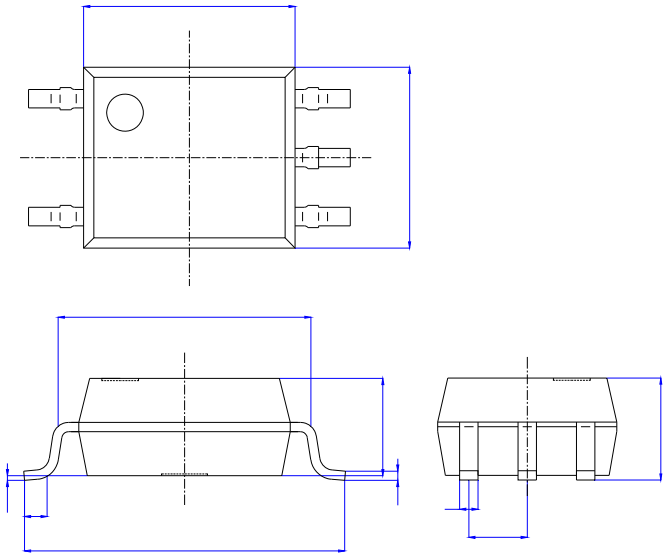

| | | | | | | |
|---|---|---|---|---|---|---|
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

## RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

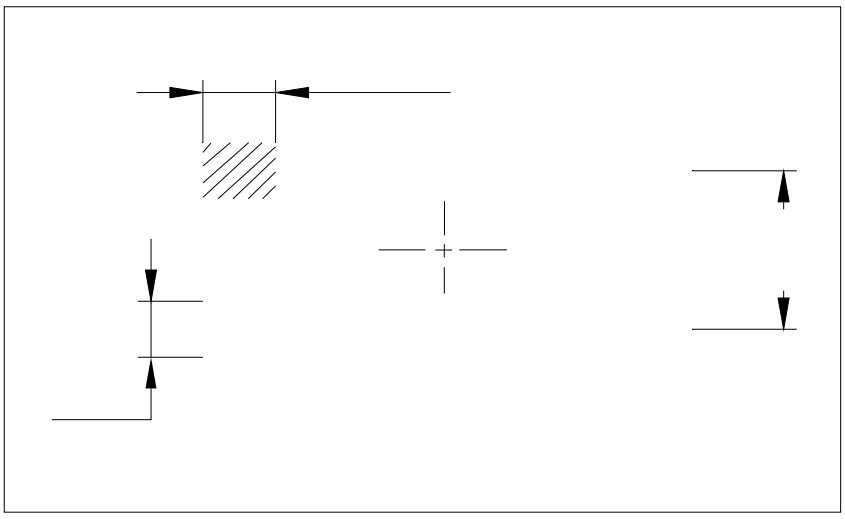

## CARRIER TAPE SPECIFICATIONS (Dim
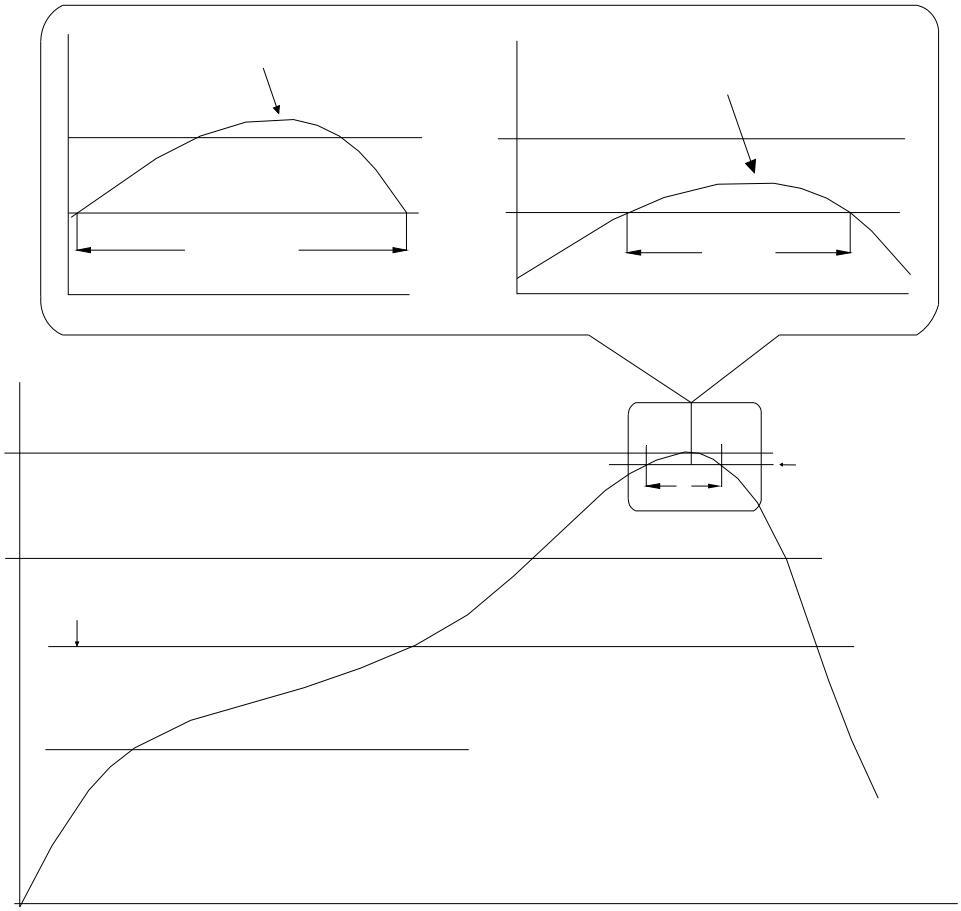
## REFLOW INFORMATION