




JOCMA28D-SS4

Rev.A.1.0

DESCRIPTION:

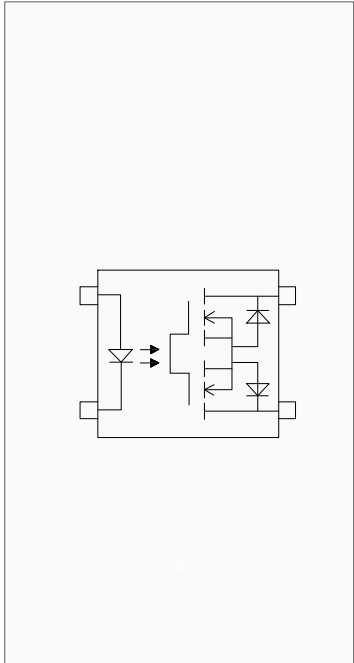

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Value	Unit

--	--	--	--

NOTE1: 100 μ s pulse, 100Hz frequency

NOTE2: AC for 1 minute, R.H.=40~60%


ELECTRICAL CHARACTERISTICS

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit

Recommended Operating Conditions

Characteristics	Symbol	Min.	Typ.	Max.	Unit

ORDERING INFORMATION

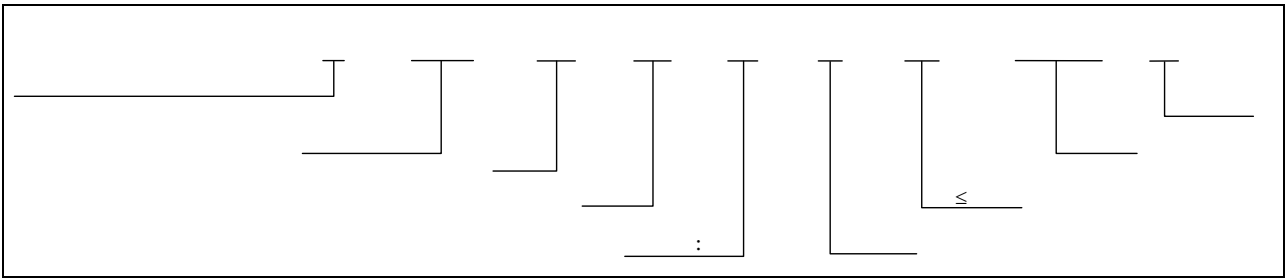

Packing Quantity	
Option	Quantity
SSON4	2500 Units/Reel

Characteristics Curves

FIG.1:

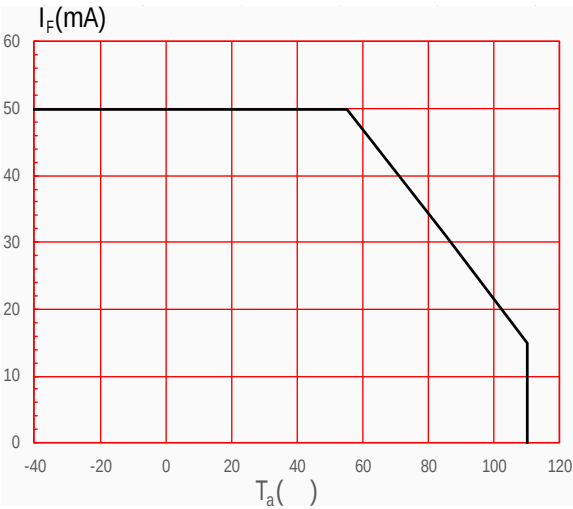


FIG.2:

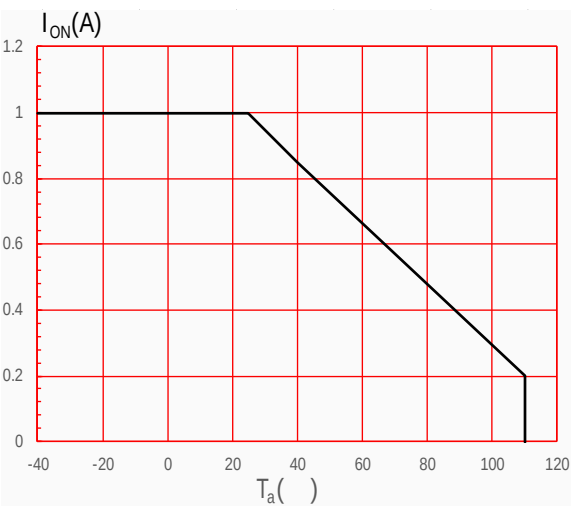


FIG.3:

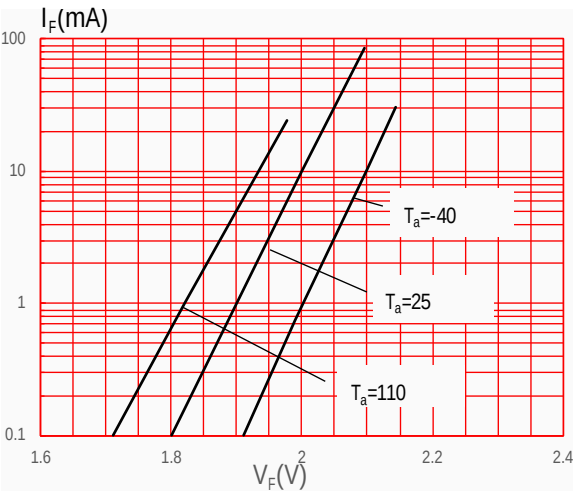


FIG.4:

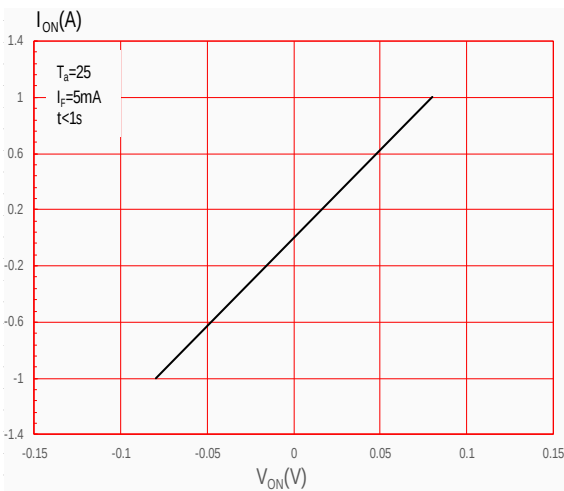


FIG.5:



FIG.6:

FIG.7:



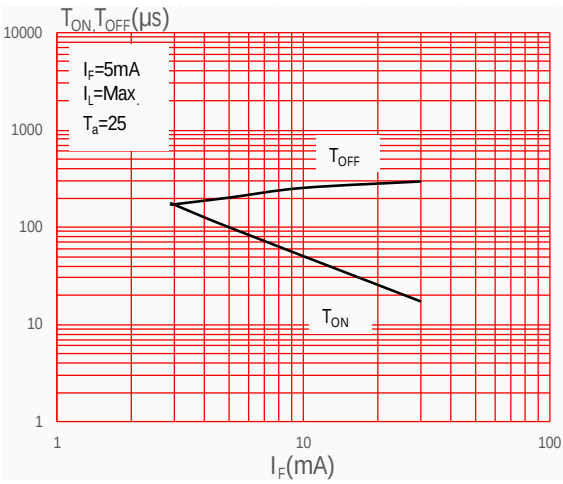



FIG.8:

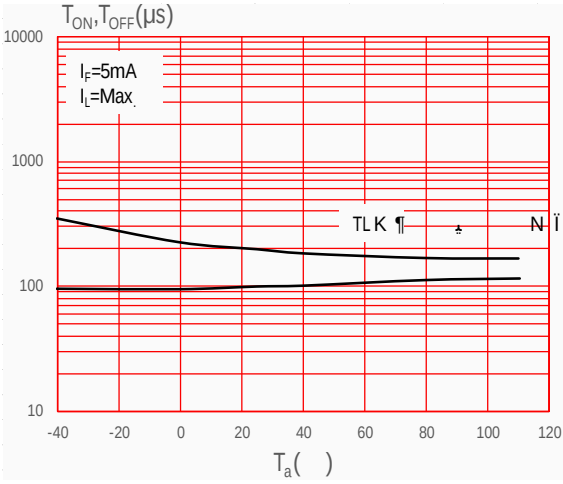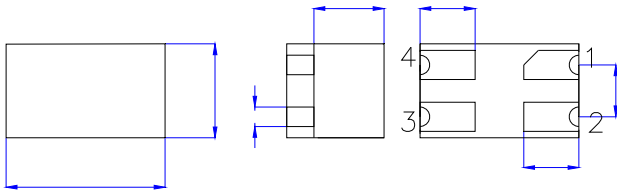


A diagram of a rectangle divided into two horizontal sections. The top section is labeled 'a' and the bottom section is labeled 'b'. The total height of the rectangle is labeled 'a + b' on the right side.

[illegible]

CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

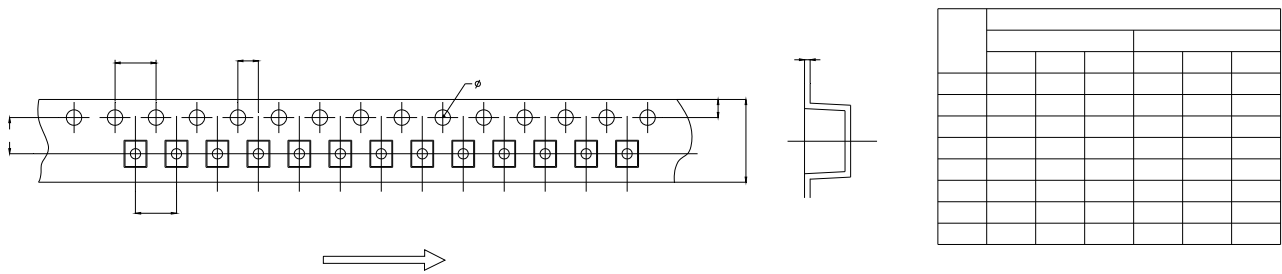

REFLOW INFORMATION

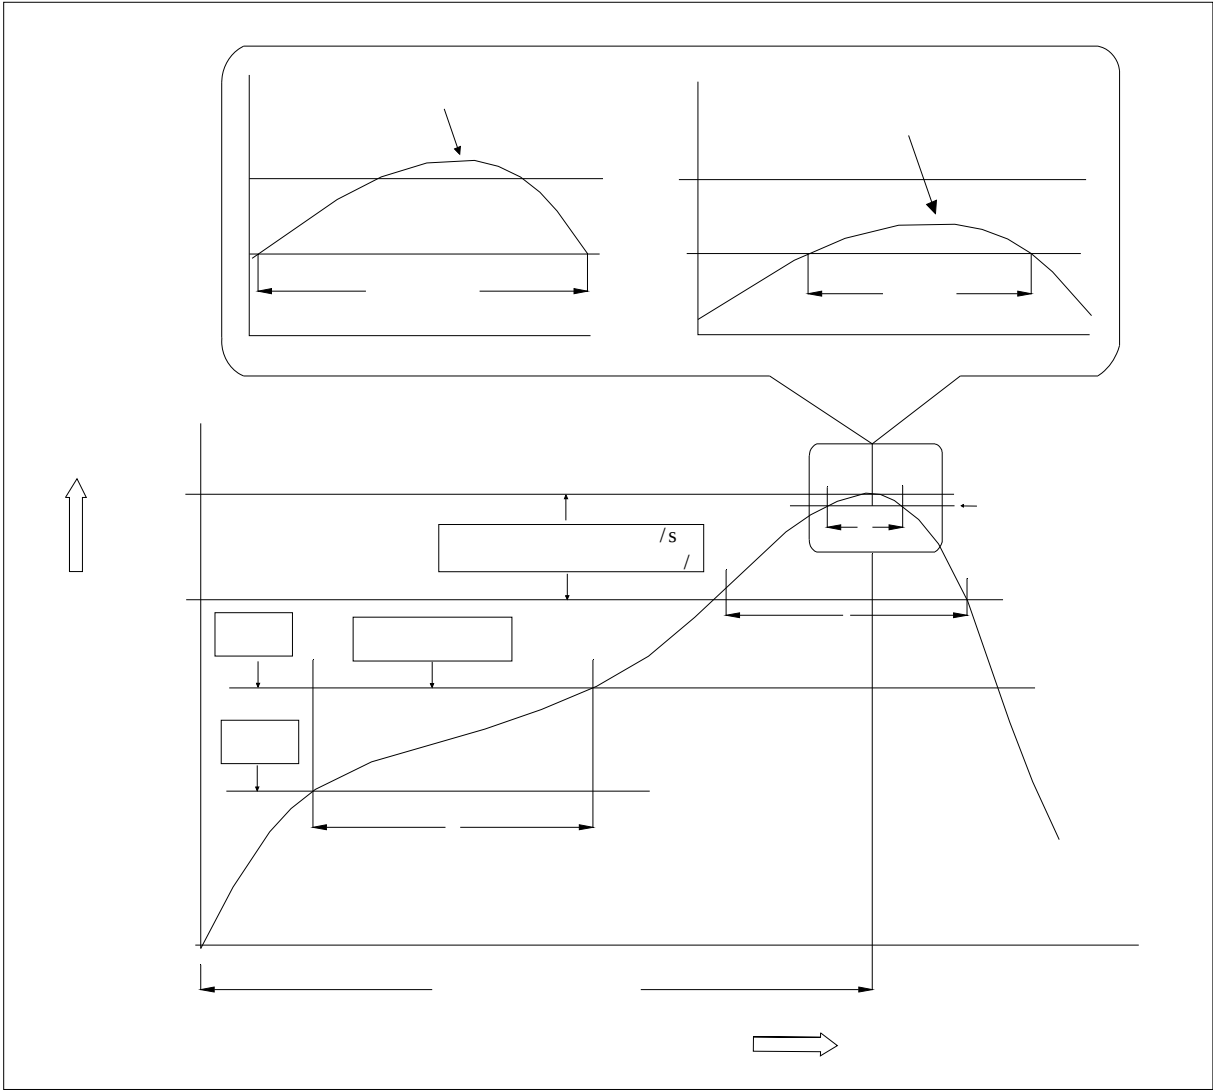

Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile

