



JOCMA2AC-D6P



JOCMA2AC-D6S



Parameter		Symbol	Value	Unit

--	--	--	--

: 100μs pulse, 100Hz frequency
: AC for 1minute, R.H.=40~60%

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit

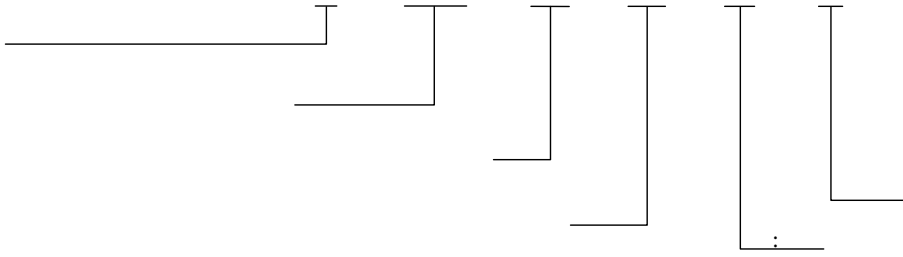


FIG.1:

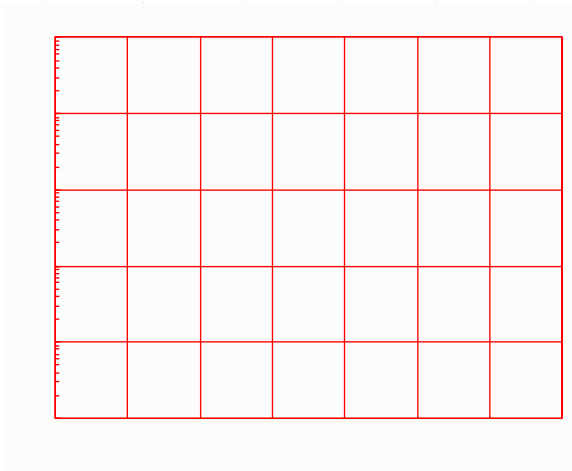


FIG.2:




FIG.7:

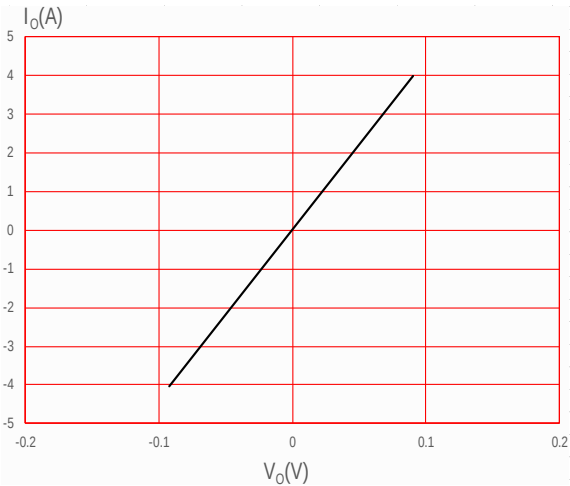


FIG.8:

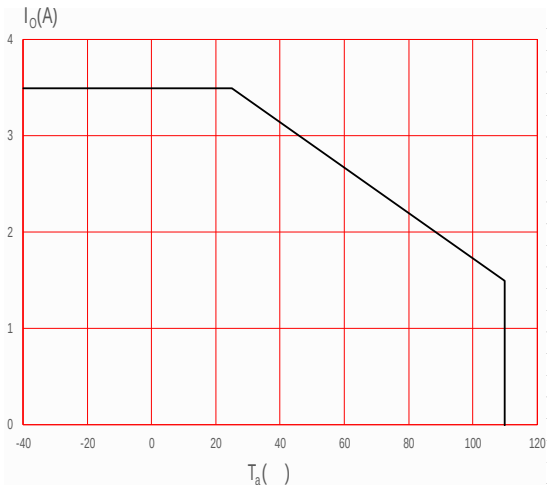


FIG.9:



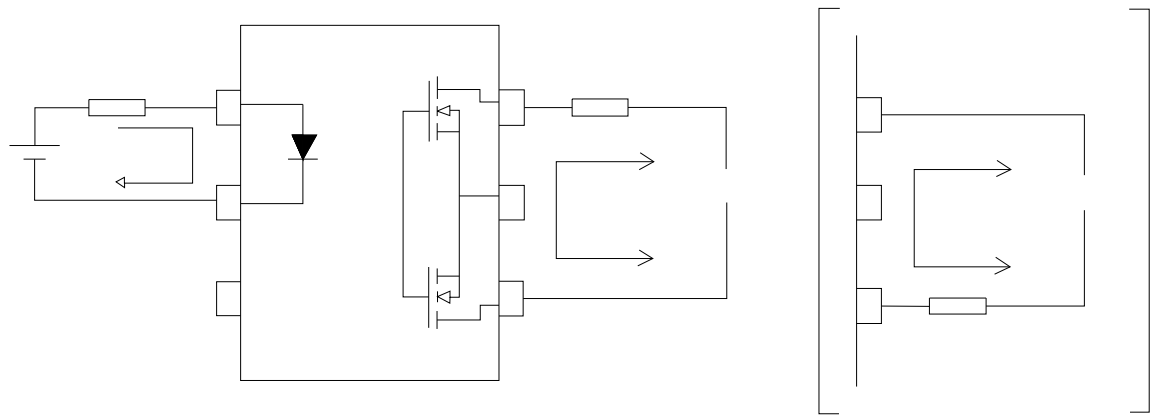



FIG.10:

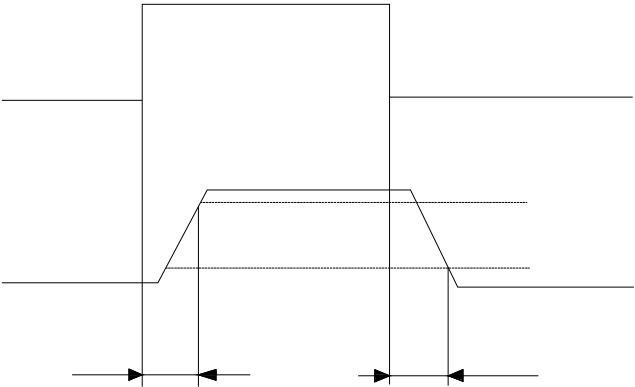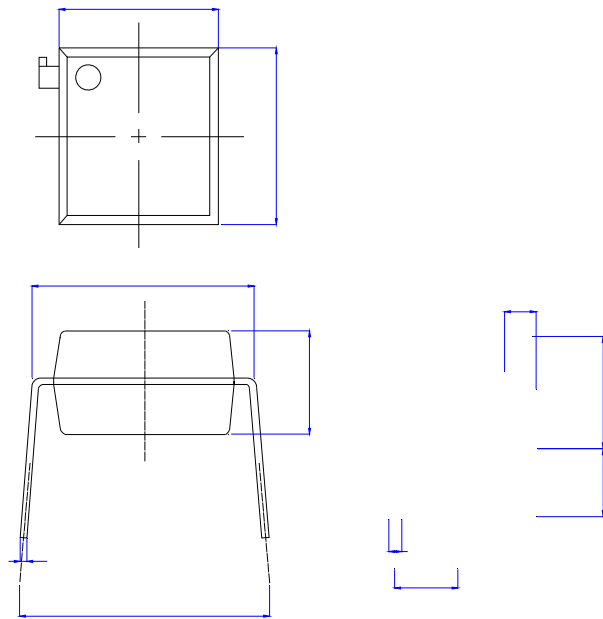


Standard DIP Type:



[illegible]


Option SMD

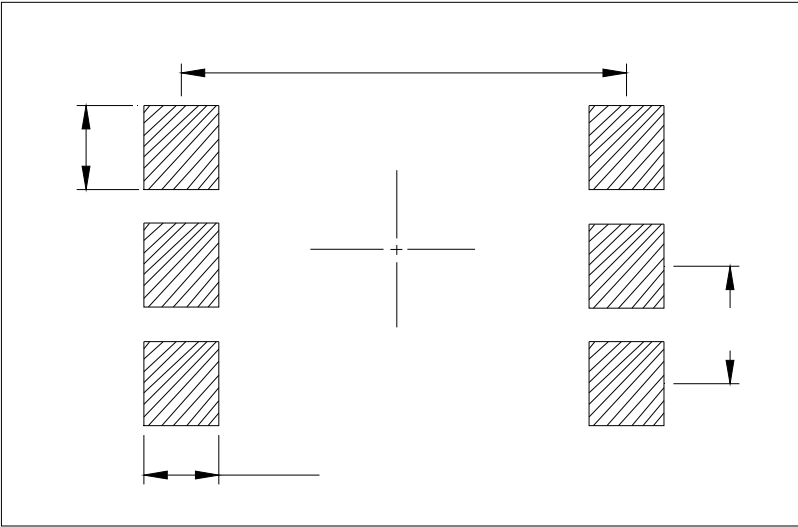

Standard DIP

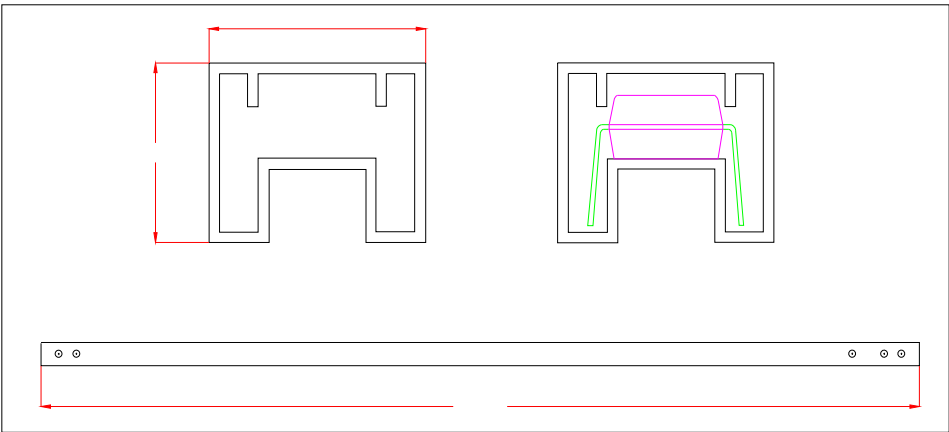

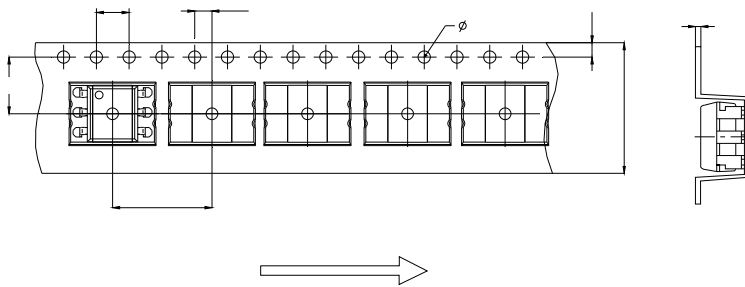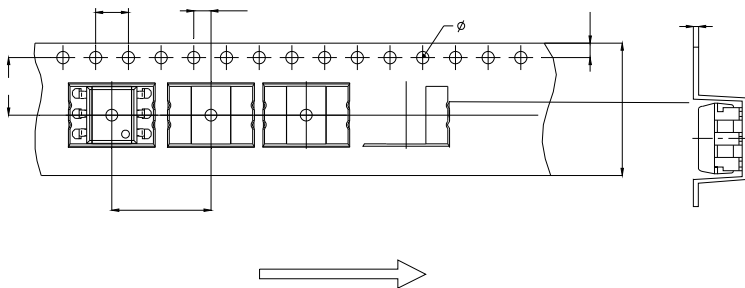[illegible][illegible]

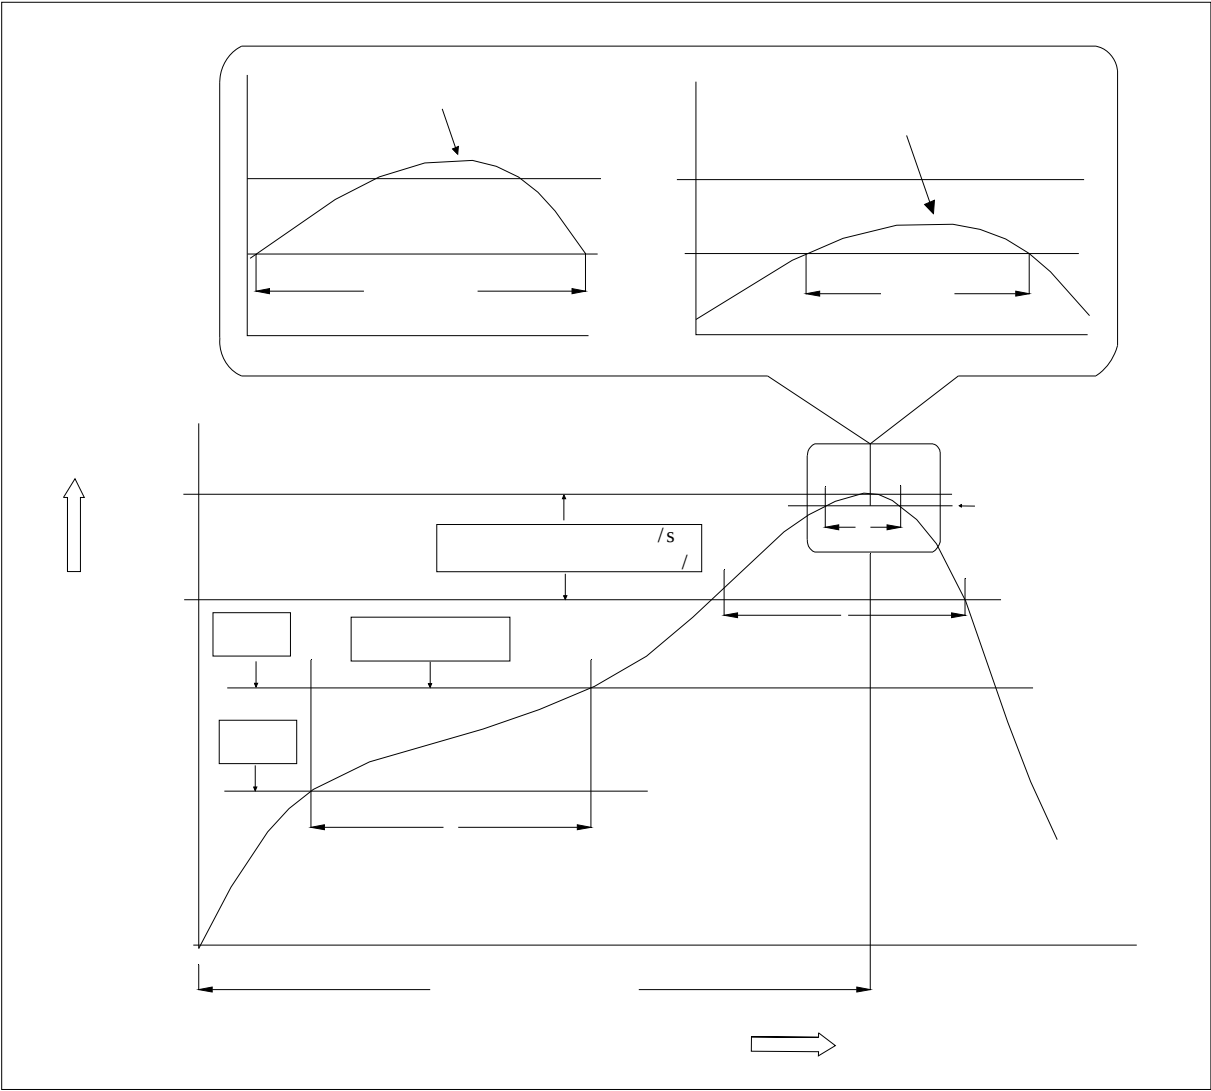

Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile

